

COMPACT GAS SPRING

Note:



Initial spring force at 150 bar = 750 daN

Worn gas springs cannot be repaired, they have to be replaced completely.

When mounting to floor, contact over the entire floor of the cylinder tube must be ensured!

Pressure medium: Nitrogen N₂
 Max. filling pressure: 150 bar
 Min. filling pressure: 25 bar
 Working temperature: 0°C to +80°C
 Temperature related force increase: ± 0.3%/°C
 Max. recommended extensions per minute: approx. 50 to 100 (at 20°C)
 Max. piston speed: 0.8 m/s

2490.14.00750.

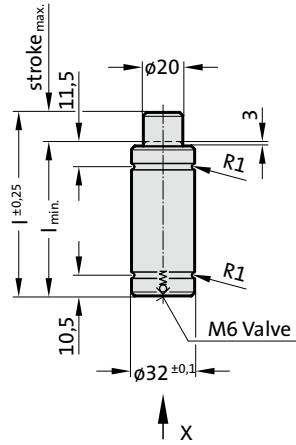


2490.14.00750.

Compact gas spring


Order No	Stroke _{max} (s)	I _{min}	I	g ₂ *
2490.14.00750.006	6	57	63	51
2490.14.00750.010	10	65	75	59
2490.14.00750.016	16	77	93	71
2490.14.00750.025	25	95	120	89
2490.14.00750.032	32	108	140	102
2490.14.00750.040	40	125	165	119
2490.14.00750.050	50	145	195	139

*see mounting example

Initial spring force versus charge pressure

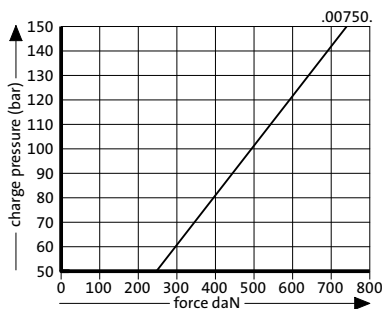

Spring force Diagram displacement versus stroke rise

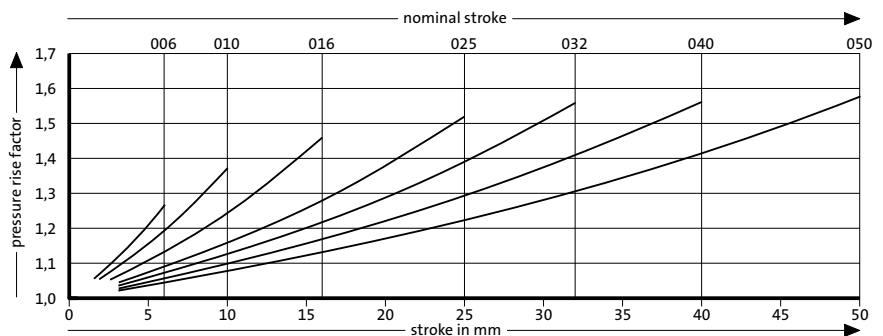

Pressure rise factor accounts for displacement but not external influences!